

Rated Voltage : 12V/ 24V

Operating Temp : 10~70°C

Protection : Auto-Restart



 Material : Housing Plastic (UL : 94V-0)
 Impeller Plastic (UL : 94V-0)

Weight : 325g

Safety Approval



AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

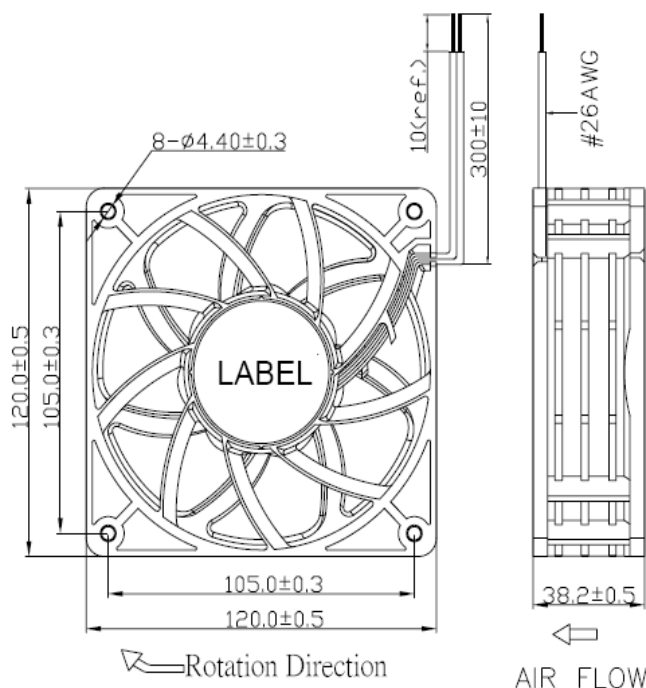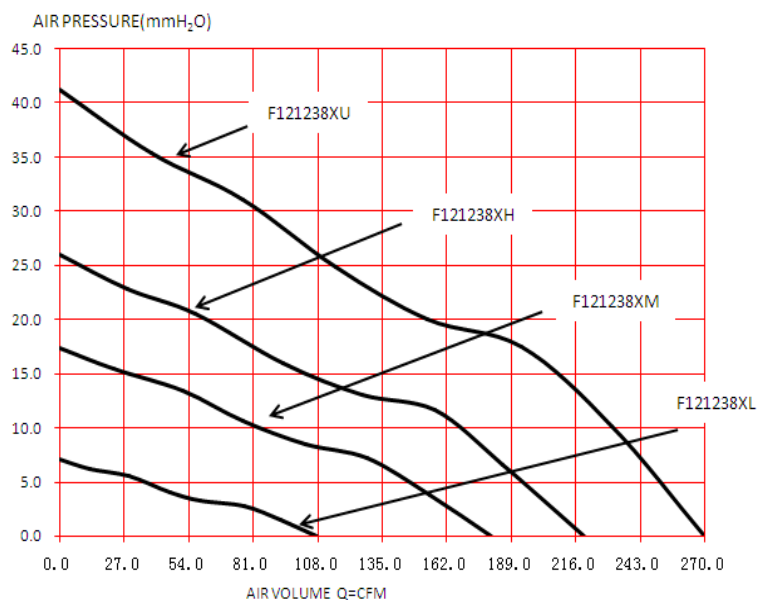

Series	Bearing (*)	Rated Voltage (V)	Rated Current (Amp)	Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Noise dB(A)
						(CFM)	m ³ /min		
F121238XL	●	12	0.41	4.92	3000	107.81	3.05	7.04	44
F121238XM	●	12	1.3	15.60	5000	180.61	5.12	17.4	58
F121238XH	●	12	2.5	30.00	6200	222.33	6.31	23.27	65
F121238XU	●	12	3.51	42.12	7200	269.91	7.65	41.25	65.9

*Bearing Type : ○ Sleeve ▲EBR ●2 Ball

*Noise measured at the distance of one meter from the axis of intake.

*The latest version would be as per the standard issued by REGO only.