

Rated Voltage : 12V

Operating Temp : 10~70°C

Protection : Auto-Restart



Material : Housing Plastic (UL : 94V-0)
Impeller Plastic (UL : 94V-0)

Weight : 340g

Safety Approval



AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

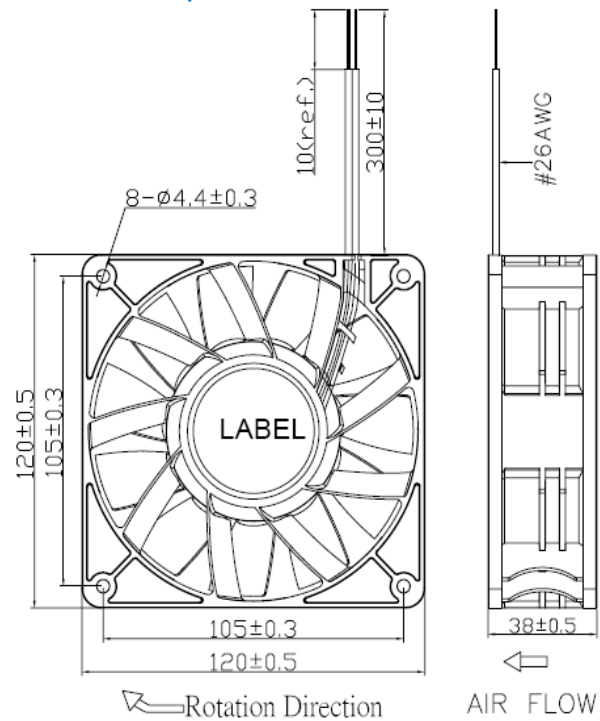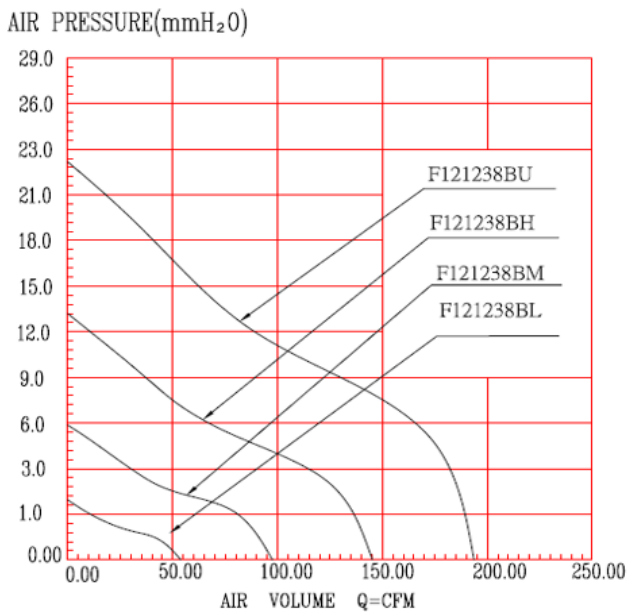

Series	Bearing (*)	Rated Voltage (V)	Rated Current (Amp)	Input Power (W)	Rated Speed (rpm)	Air Flow (CFM)	m3/min	Static Pressure (mmH2O)	Noise dB(A)
F121238XL	●	12	0.38	4.56	1200	53.66	1.52	1.74	29
F121238XM	●	12	0.45	5.40	2200	98.38	2.79	5.83	45
F121238XH	●	12	1.0	12.00	3200	145.90	4.14	13.24	54
F121238XU	●	12	2.5	30.00	4200	193.38	5.49	22.65	61

*Bearing Type : ○ Sleeve ▲ EBR ● 2 Ball

*Noise measured at the distance of one meter from the axis of intake.

*The latest version would be as per the standard issued by REGO only.