

Rated Voltage : 12V

Operating Temp : 10~70°C

Protection : Auto-Restart/ Impedance



Material : Housing Plastic (UL : 94V-0)
 Impeller Plastic (UL : 94V-0)

Weight : 147g

Safety Approval



AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)
 STATIC PRESSURE (mmH2O)

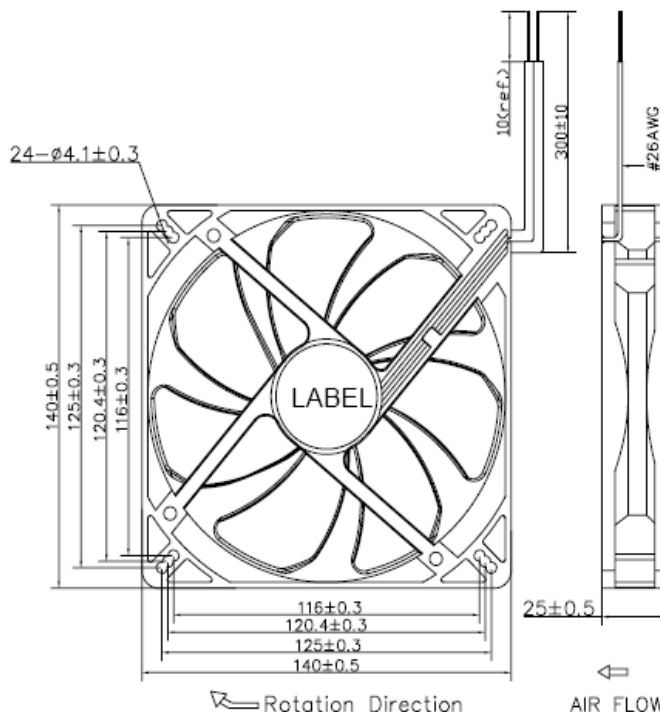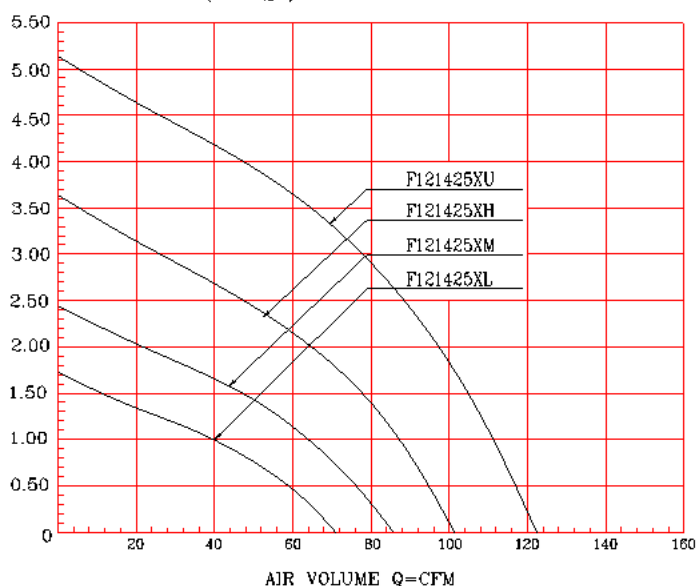

Series	Bearing (*)	Rated Voltage (V)	Rated Current (Amp)	Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH2O)	Noise dB(A)
						(CFM)	m3/min		
F121425XL	●	12	0.20	2.40	1500	70.94	2.01	1.71	26.5
F121425XM	●	12	0.35	4.20	1800	85.13	2.41	2.46	33.1
F121425XH	●	12	0.60	7.20	2200	104.05	2.95	3.68	39.2
F121425XU	●	12	1.10	13.20	2600	122.97	3.48	5.14	43.3
F121425XL	▲	12	0.20	2.40	1500	70.94	2.01	1.71	26.5
F121425XM	▲	12	0.35	4.20	1800	85.13	2.41	2.46	33.1
F121425XH	▲	12	0.60	7.20	2200	104.05	2.95	3.68	39.2

*Bearing Type : ○ Sleeve ▲ EBR ● 2 Ball

*Noise measured at the distance of one meter from the axis of intake.

*The latest version would be as per the standard issued by REGO only.