

Rated Voltage : 5V /12V

Operating Temp : 10~70°C

Protection : Auto-Restart /Impedance



Material : Housing Plastic (UL : 94V-0)  
 Impeller Plastic (UL : 94V-0)

Weight : 15g

Safety Approval



AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

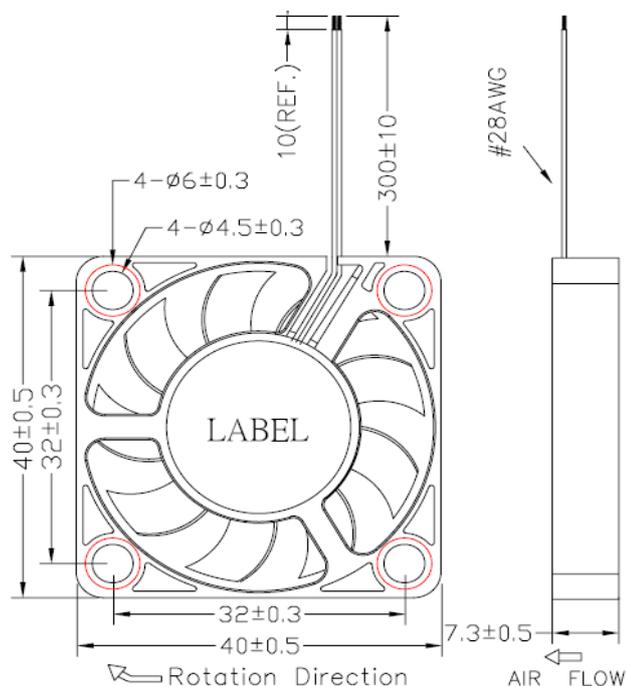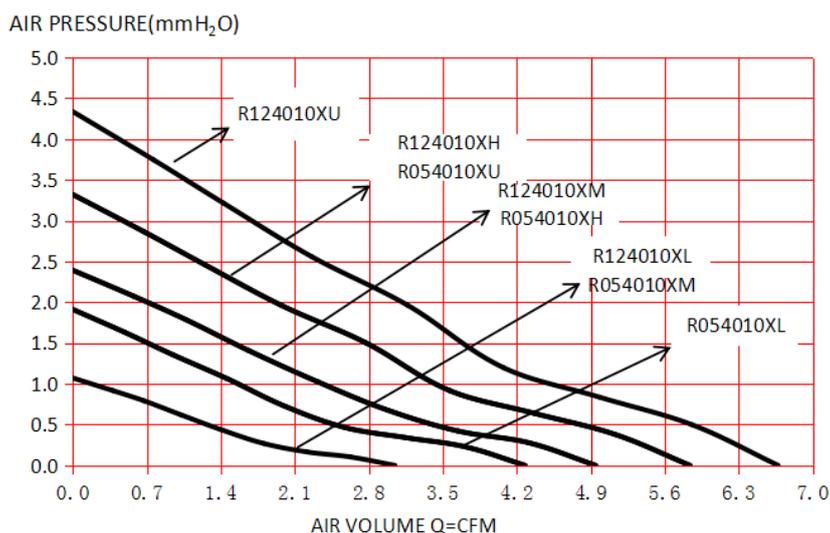

Series	Bearing (*)	Rated Voltage (V)	Rated Current (Amp)	Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH2O)	Noise dB(A)
						(CFM)	m3/min		
R124010XL	▲	12	0.10	1.20	5000	4.28	0.12	1.91	21.9
R124010XM	▲	12	0.12	1.44	6000	4.95	0.14	2.39	25.4
R124010XH	▲	12	0.14	1.68	7000	5.84	0.17	3.32	29.2
R124010XU	▲	12	0.18	2.16	8000	6.67	0.19	4.34	33.1
R054010XL	▲	5	0.08	0.40	4000	3.05	0.09	1.07	19.6
R054010XM	▲	5	0.13	0.65	5000	4.28	0.12	1.91	21.9
R054010XH	▲	5	0.16	0.80	6000	4.95	0.14	2.39	25.4
R054010XU	▲	5	0.25	1.25	7000	5.84	0.17	3.32	29.2

\*Bearing Type : ○ Sleeve ▲EBR ●2 Ball

\*Noise measured at the distance of one meter from the axis of intake.

\*The latest version would be as per the standard issued by REGO only.