

Rated Voltage : 5V /12V

Operating Temp : 10~70°C

Protection : Auto-Restart /Impedance



Material : Housing Plastic (UL : 94V-0)  
 Impeller Plastic (UL : 94V-0)

Weight : 15g

Safety Approval



AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

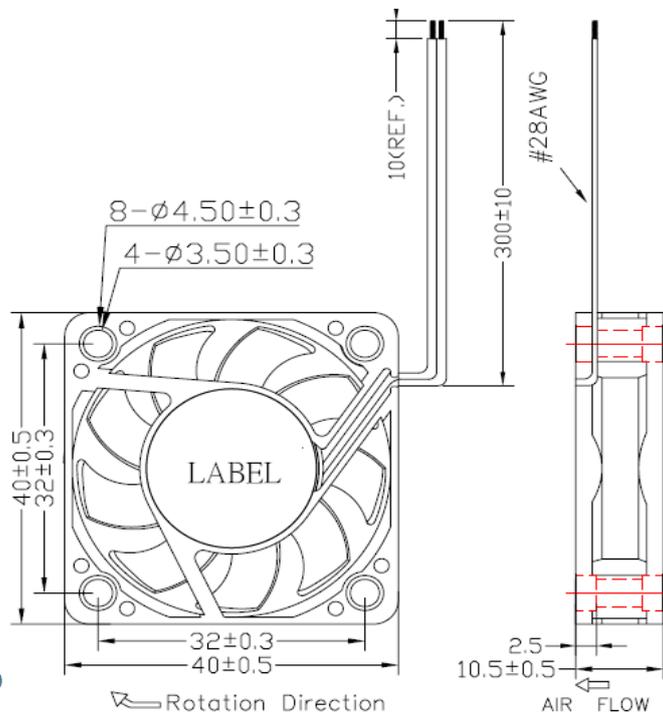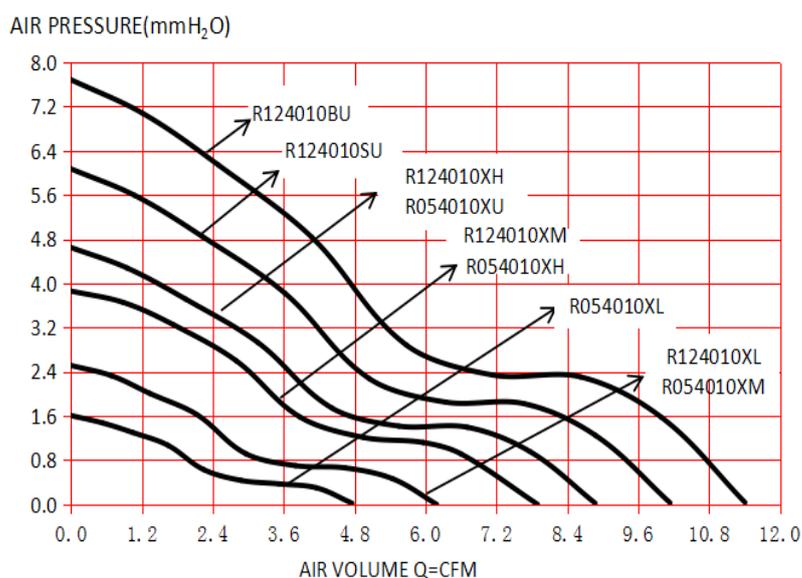

Series	Bearing (*)	Rated Voltage (V)	Rated Current (Amp)	Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH2O)	Noise dB(A)
						(CFM)	m3/min		
R124010XL	▲●	12	0.10	1.20	5000	6.19	0.18	2.51	23.3
R124010XM	▲●	12	0.12	1.44	6000	7.90	0.22	3.86	27.9
R124010XH	▲●	12	0.14	1.68	7000	8.87	0.25	4.65	33.1
R124010XU	▲	12	0.18	2.16	8000	10.14	0.29	6.07	36.3
R124010XU	●	12	0.18	2.16	9000	11.41	0.32	7.68	40.2
R054010XL	▲●	5	0.13	0.65	4000	4.76	0.13	1.61	21.1
R054010XM	▲●	5	0.15	0.75	5000	6.19	0.18	2.51	23.3
R054010XH	▲●	5	0.25	1.25	6000	7.9	0.22	3.86	27.9
R054010XU	▲	5	0.33	1.65	7000	8.87	0.25	4.65	33.1
R054010XU	●	5	0.34	1.70	7500	9.50	0.27	5.34	34.6

\*Bearing Type : ○ Sleeve ▲EBR ●2 Ball

\*Noise measured at the distance of one meter from the axis of intake.

\*The latest version would be as per the standard issued by REGO only.