

Rated Voltage : 12V

Operating Temp : 10~70°C

Protection : Auto-Restart /Impedance

Material : Housing Plastic (UL : 94V-0)  
 Impeller Plastic (UL : 94V-0)



Weight : 30g

Safety Approval



AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE(mmH<sub>2</sub>O)

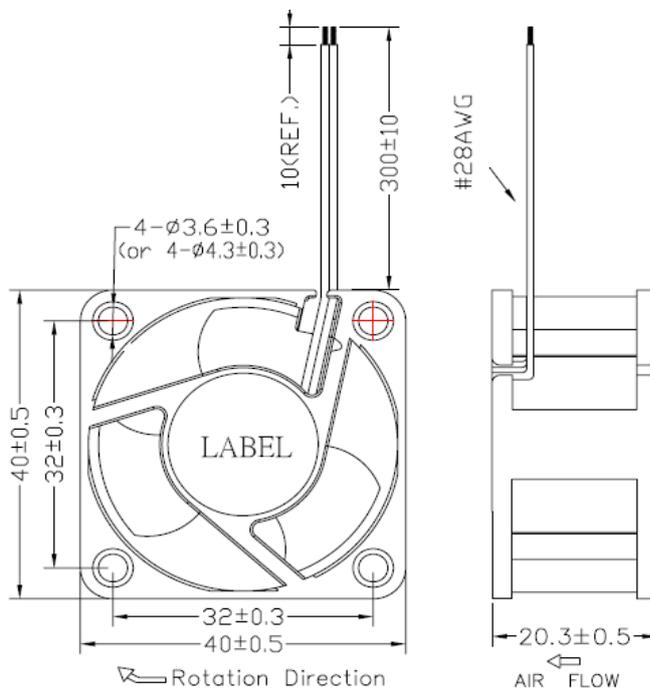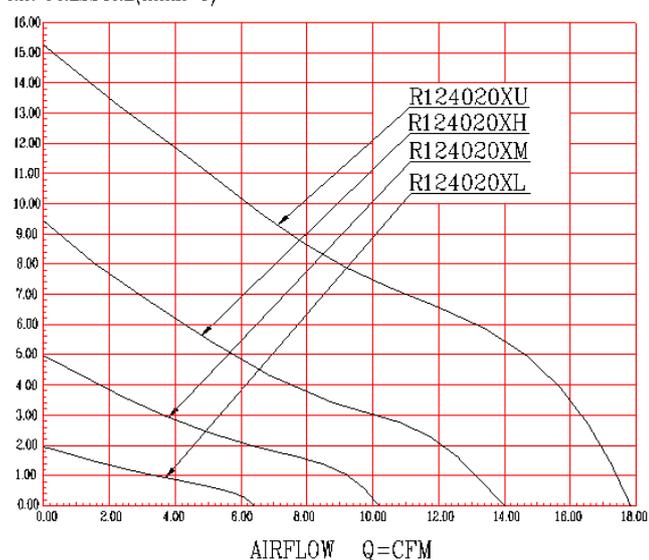

Series	Bearing (*)	Rated Voltage (V)	Rated Current (Amp)	Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH <sub>2</sub> O)	Noise dB(A)
						(CFM)	m <sup>3</sup> /min		
R124020XL	▲●	12	0.13	1.56	5000	6.37	0.18	1.94	26
R124020XM	▲●	12	0.16	1.92	8000	10.19	0.29	4.98	38
R124020XH	▲●	12	0.23	2.76	11000	14.01	0.40	9.41	46
R124020XU	▲●	12	0.45	5.4	14000	17.83	0.51	15.24	56

\*Bearing Type : ○ Sleeve ▲EBR ●2 Ball

\*Noise measured at the distance of one meter from the axis of intake.

\*The latest version would be as per the standard issued by REGO only.