

Rated Voltage : 12V

Operating Temp : 10~70°C

Protection : Auto-Restart /Impedance



 Material : Housing Plastic (UL : 94V-0)
 Impeller Plastic (UL : 94V-0)

Weight : 45g

Safety Approval



AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

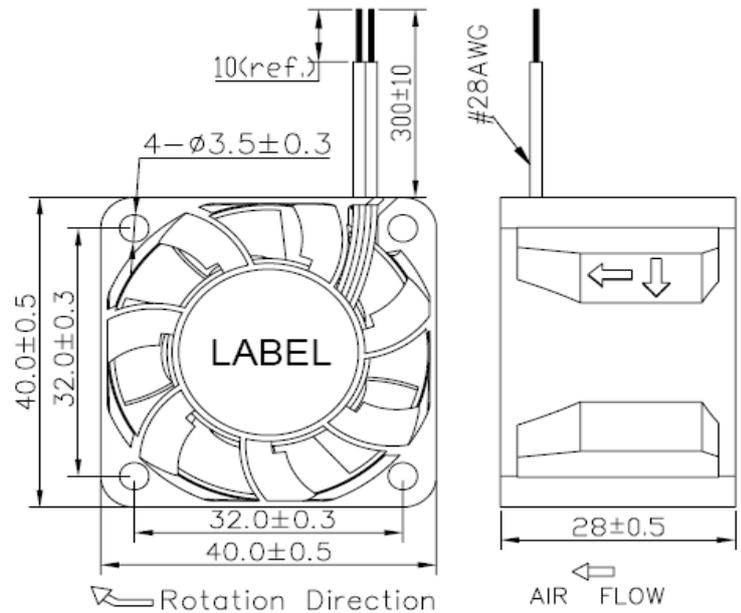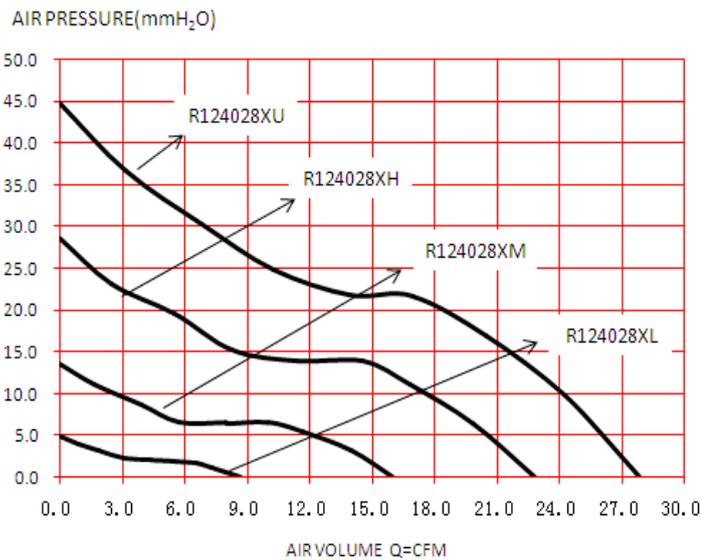

Series	Bearing (*)	Rated Voltage (V)	Rated Current (Amp)	Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Noise dB(A)
						(CFM)	m ³ /min		
R124028XL	●	12	0.09	1.08	6000	8.71	0.25	4.83	32
R124028XM	●	12	0.23	2.76	10000	15.98	0.45	13.62	47
R124028XH	●	12	0.45	5.40	14000	22.80	0.65	28.51	56
R124028XU	●	12	0.90	10.80	17000	27.86	0.79	44.71	60

*Bearing Type : ○ Sleeve ▲ EBR ● 2 Ball

*Noise measured at the distance of one meter from the axis of intake.

*The latest version would be as per the standard issued by REGO only.