

Rated Voltage : 5V /12V

Operating Temp : 10~70°C

Protection : Auto-Restart /Impedance



Material : Housing Plastic (UL : 94V-0)
 Impeller Plastic (UL : 94V-0)

Weight : 30g

Safety Approval



AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

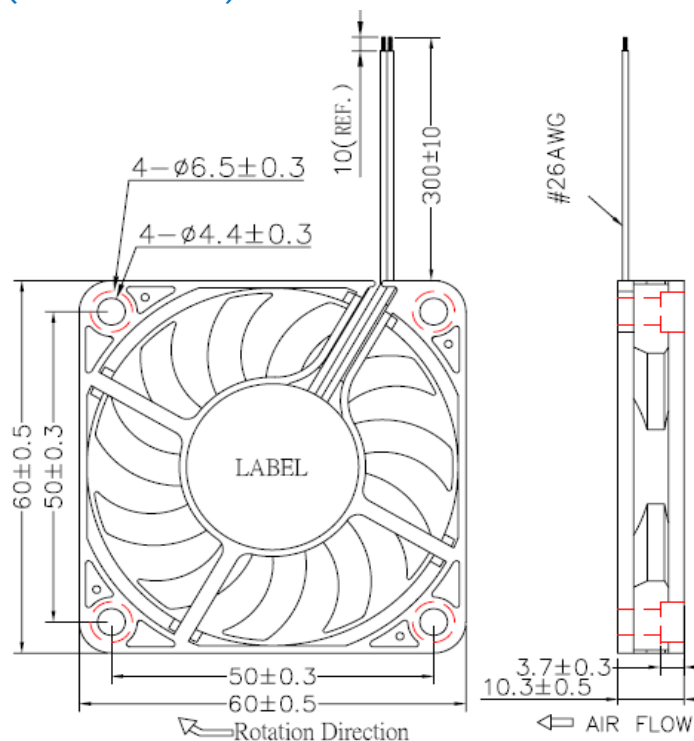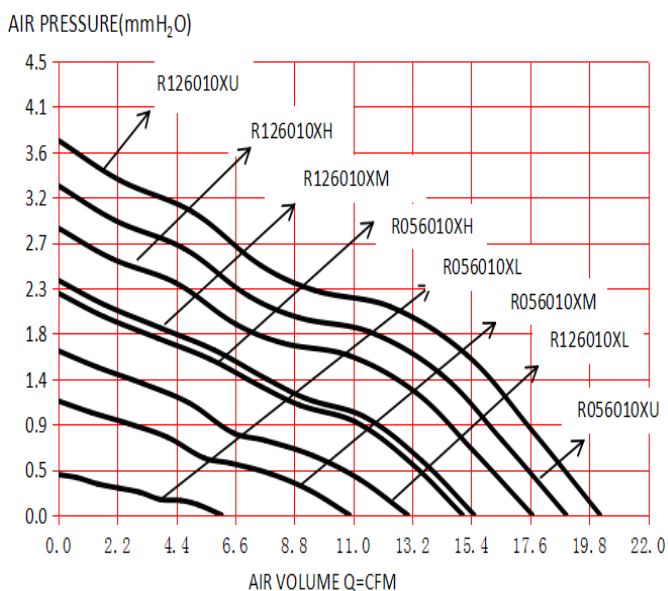

Series	Bearing (*)	Rated Voltage (V)	Rated Current (Amp)	Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH2O)	Noise dB(A)
						(CFM)	m3/min		
R126010XL	▲●	12	0.10	1.20	3000	13.04	0.37	1.63	24.6
R126010XM	▲●	12	0.14	1.68	3600	15.51	0.44	2.33	28.2
R126010XH	▲●	12	0.20	2.40	4200	17.68	0.50	2.84	33.0
R126010XU	▲●	12	0.25	3.00	4800	20.21	0.57	3.71	35.5
R056010XL	▲●	5	0.03	0.15	1550	6.09	0.17	0.40	19.0
R056010XM	▲●	5	0.07	0.35	2500	10.86	0.31	1.13	20.5
R056010XH	▲●	5	0.15	0.75	3500	15.08	0.43	2.20	27.7
R056010XU	▲	5	0.31	1.55	4500	18.95	0.54	3.27	33.8
R056010XU	●	5	0.33	1.65	4800	20.21	0.57	3.71	35.5

*Bearing Type : ○ Sleeve ▲EBR ●2 Ball

*Noise measured at the distance of one meter from the axis of intake.

*The latest version would be as per the standard issued by REGO only.