

Rated Voltage : 12V/ 48V

Operating Temp : 10~70°C

Protection : Auto-Restart



Material : Housing Plastic (UL : 94V-0)  
Impeller Plastic (UL : 94V-0)

Weight : 197g

Safety Approval



AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

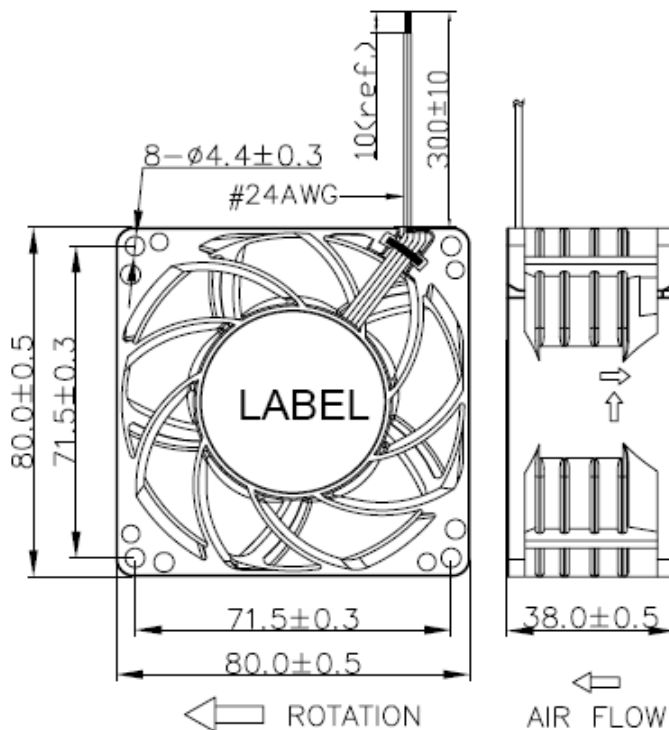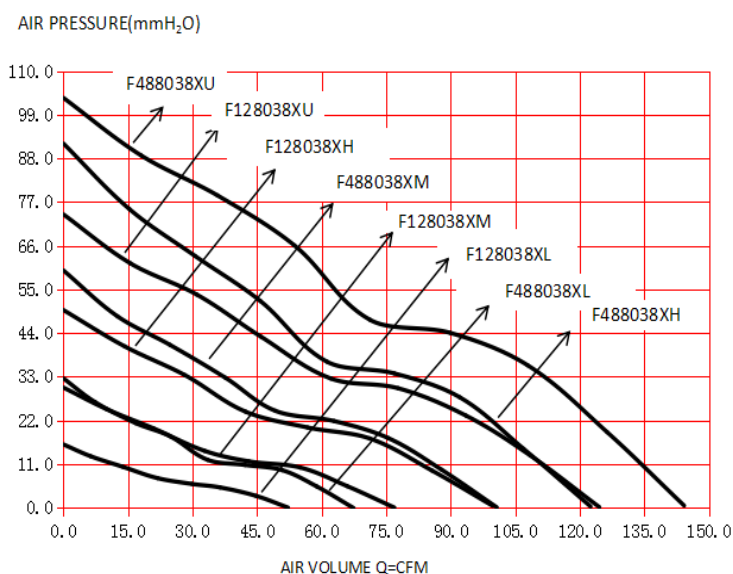

Series	Bearing g (* )	Rated Voltage (V)	Rated Current (Amp)	Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH2O)	Noise dB(A)
						(CFM)	m3/min		
F128038XL	●	12	0.55	6.6	6000	52.18	1.48	15.91	44.5
F128038XM	●	12	0.96	11.52	9000	76.89	2.18	30.23	55.5
F128038XH	●	12	1.47	17.64	12000	99.70	2.82	49.75	61.8
F128038XU	●	12	2.85	34.2	15000	124.53	3.53	73.84	69.0
F488038XL	●	48	0.13	6.24	8000	67.40	1.91	32.54	52.5
F488038XM	●	48	0.34	16.32	12000	100.70	2.85	59.72	61.8
F488038XH	●	48	0.66	31.68	15000	122.49	3.47	91.68	69.0
F488038XU	●	48	0.94	45.12	17000	144.22	4.09	103.18	70.0

\*Bearing Type : ○ Sleeve ▲ EBR ● 2 Ball

\*Noise measured at the distance of one meter from the axis of intake.

\*The latest version would be as per the standard issued by REGO only.