

Rated Voltage : 12V

Operating Temp : 10~70°C

Protection : Auto-Restart/ Impedance



Material : Housing Plastic (UL : 94V-0)  
Impeller Plastic (UL : 94V-0)

Weight : 62g

Safety Approval



AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

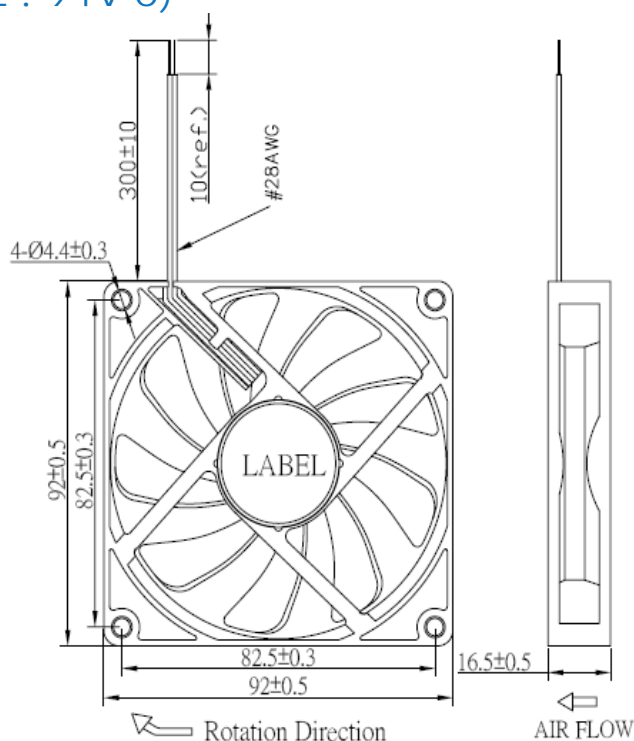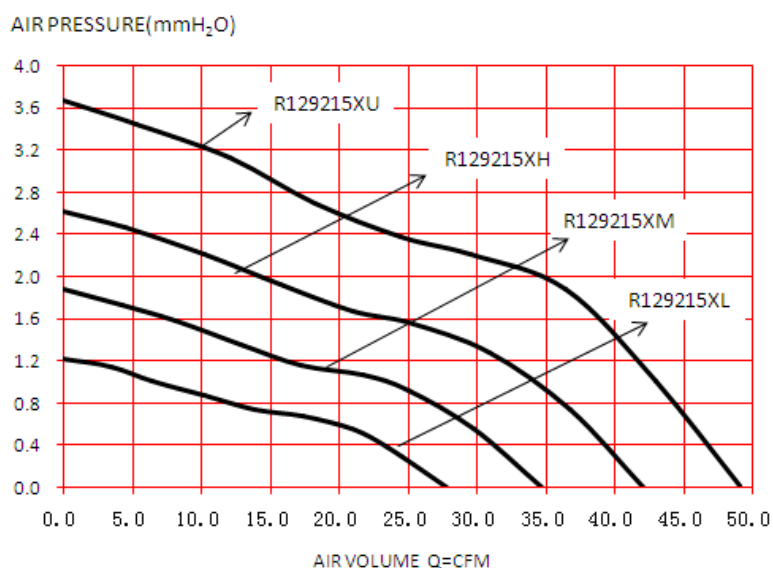

Series	Bearing (*)	Rated Voltage (V)	Rated Current (Amp)	Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH <sub>2</sub> O)	Noise dB(A)
						(CFM)	m <sup>3</sup> /min		
R129215XL	▲●	12	0.08	0.96	2000	27.78	0.79	1.21	24.5
R129215XM	▲●	12	0.15	1.80	2500	34.70	0.98	1.88	30
R129215XH	▲●	12	0.21	2.52	3000	42.17	1.19	2.63	39
R129215XU	▲●	12	0.33	3.96	3500	48.98	1.39	3.67	42

\*Bearing Type : ○ Sleeve ▲EBR ●2 Ball

\*Noise measured at the distance of one meter from the axis of intake.

\*The latest version would be as per the standard issued by REGO only.