

Rated Voltage : 12V



Operating Temp : 10~70°C

Protection : Auto-Restart

Material : Housing Plastic (UL : 94V-0)  
 Impeller Plastic (UL : 94V-0)

Weight : 165g

Safety Approval

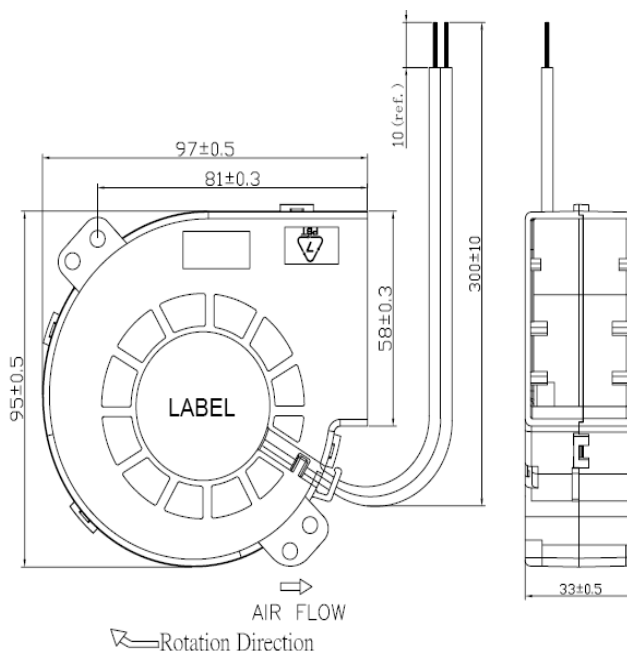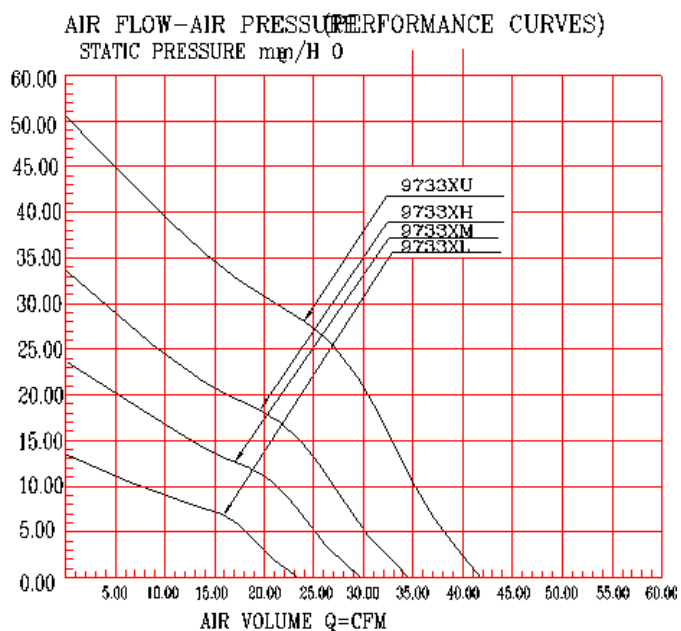

Series	Bearing (*)	Rated Voltage (V)	Rated Current (Amp)	Input Power (W)	Rated Speed (rpm)	Air Flow (CFM)	m3/min	Static Pressure (mmH2O)	Noise dB(A)
B129733XL	●	12	0.40	4.80	2600	23.53	0.67	13.57	46.4
B129733XM	●	12	0.45	5.40	3200	29.28	0.83	23.46	50.5
B129733XH	●	12	0.80	9.60	3800	34.58	1.01	33.67	55.3
B129733XU	●	12	1.20	14.40	4600	41.65	1.18	50.47	59.8

\*Bearing Type : ○ Sleeve ▲EBR ●2 Ball

\*Noise measured at the distance of one meter from the axis of intake.

\*The latest version would be as per the standard issued by REGO only.