

Rated Voltage : 12V/ 24V



Operating Temp : 10~70°C

Protection : Auto-Restart/ Impedance

Material : Housing Plastic (UL : 94V-0)
 Impeller Plastic (UL : 94V-0)

Weight : 79g

Safety Approval

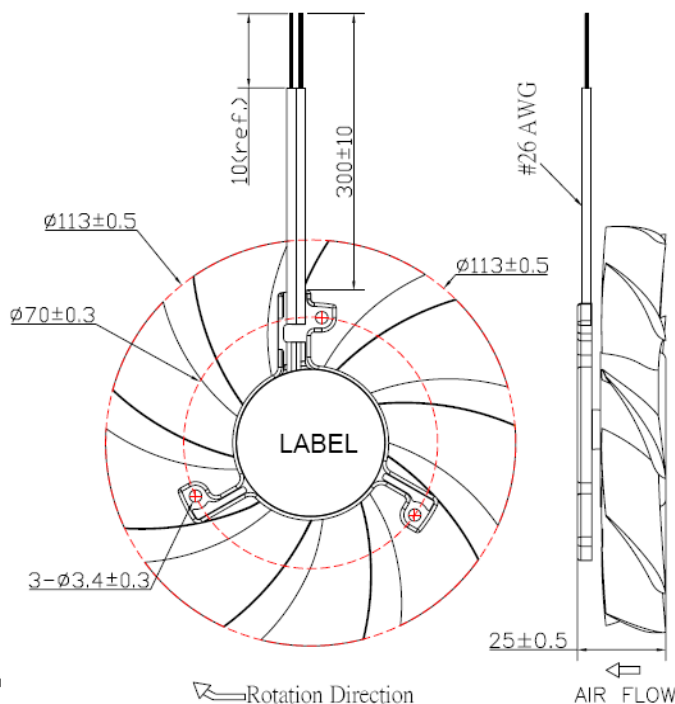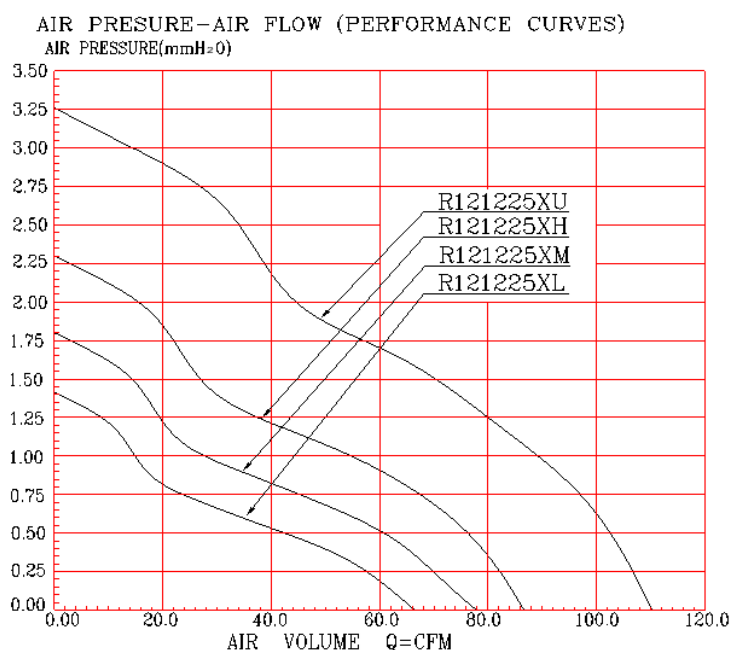

Series	Bearing (*)	Rated Voltage (V)	Rated Current (Amp)	Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Noise dB(A)
						(CFM)	m ³ /min		
T121225XL	▲●	12	0.20	2.40	1500	66.55	1.89	1.42	30.5
T121225XM	▲●	12	0.25	3.00	1800	77.85	2.21	1.80	34
T121225XH	▲●	12	0.32	3.84	2100	86.59	2.45	2.30	37.5
T121225XU	▲●	12	0.40	4.80	2400	110.03	3.12	3.26	39.5

*Bearing Type : ○ Sleeve ▲EBR ●2 Ball

*Noise measured at the distance of one meter from the axis of intake.

*The latest version would be as per the standard issued by REGO only.