

Rated Voltage : 12V

Operating Temp : 10~70°C

Protection : Auto-Restart /Impedance



Material : Housing Plastic (UL : 94V-0)
 Impeller Plastic (UL : 94V-0)

Weight : 20g

Safety Approval



AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

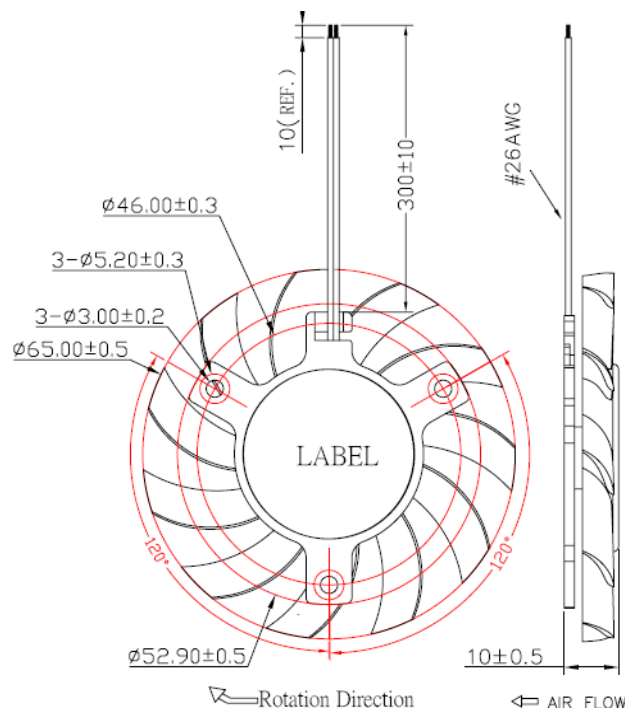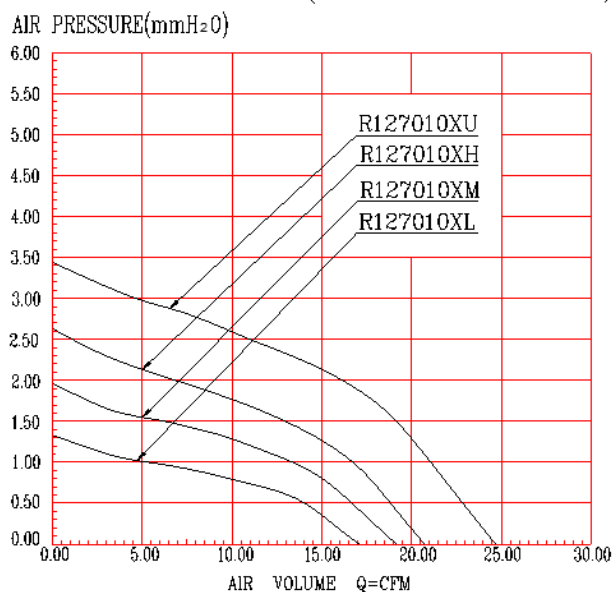

| Series | Bearing (*) | Rated Voltage (V) | Rated Current (Amp) | Input Power (W) | Rated Speed (rpm) | Air Flow | | Static Pressure (mmH ₂ O) | Noise dB(A) |
|-----------|-------------|-------------------|---------------------|-----------------|-------------------|----------|---------------------|--------------------------------------|-------------|
| | | | | | | (CFM) | m ³ /min | | |
| T127010XL | ▲● | 12 | 0.18 | 2.16 | 3000 | 15.42 | 0.44 | 1.34 | 27.3 |
| T127010XM | ▲● | 12 | 0.25 | 3.00 | 3600 | 18.51 | 0.52 | 1.93 | 31.1 |
| T127010XH | ▲● | 12 | 0.35 | 4.20 | 4200 | 21.60 | 0.61 | 2.63 | 36.7 |
| T127010XU | ▲● | 12 | 0.45 | 5.40 | 4800 | 24.69 | 0.70 | 3.43 | 40.3 |

*Bearing Type : ○ Sleeve ▲EBR ●2 Ball

*Noise measured at the distance of one meter from the axis of intake.

*The latest version would be as per the standard issued by REGO only.