

Rated Voltage : 12V



Operating Temp : 10~70°C

Protection : Auto-Restart /Impedance

 Material : Housing Plastic (UL : 94V-0)  
 Impeller Plastic (UL : 94V-0)

Weight : 32g

Safety Approval

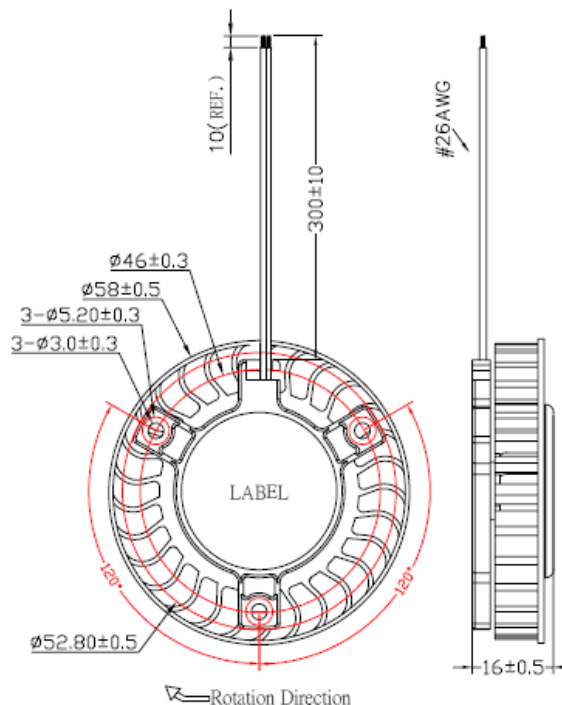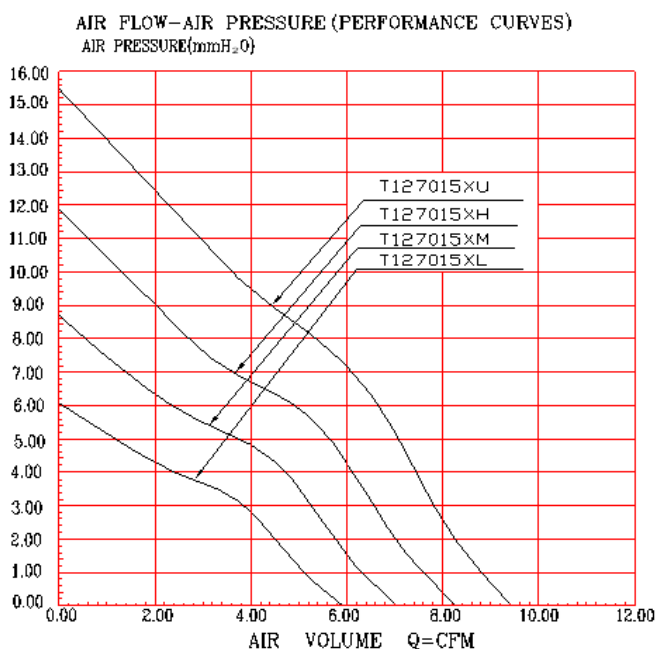

Series	Bearing (*)	Rated Voltage (V)	Rated Current (Amp)	Input Power (W)	Rated Speed (rpm)	Air Flow (CFM)	m3/min	Static Pressure (mmH <sub>2</sub> O)	Noise dB(A)
T127015XL	▲●	12	0.12	1.44	3000	5.93	0.17	6.08	37.5
T127015XM	▲●	12	0.15	1.80	3600	7.12	0.20	8.75	43.0
T127015XH	▲●	12	0.25	3.00	4200	8.30	0.24	11.91	45.0
T127015XU	▲●	12	0.30	3.60	4800	9.49	0.27	15.55	48.5

\*Bearing Type : ○ Sleeve ▲EBR ●2 Ball

\*Noise measured at the distance of one meter from the axis of intake.

\*The latest version would be as per the standard issued by REGO only.