

Rated Voltage : 12V

Operating Temp : 10~70°C

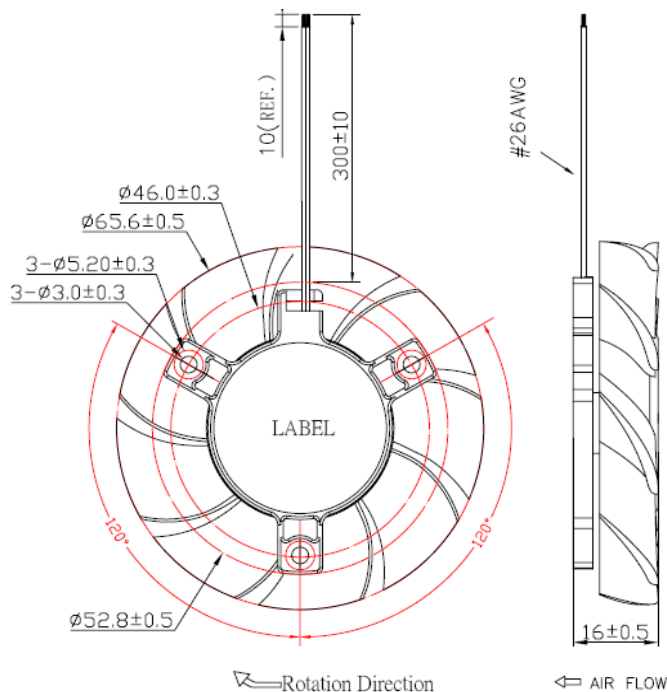
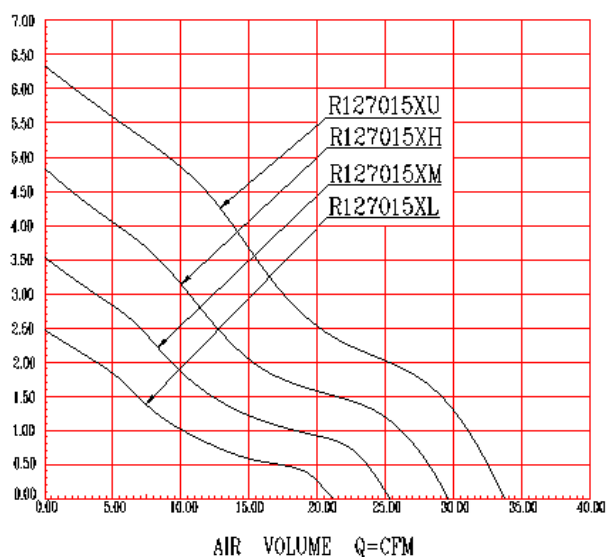
Protection : Auto-Restart /Impedance

 Material : Housing Plastic (UL : 94V-0)
 Impeller Plastic (UL : 94V-0)

Weight : 32g

Safety Approval


AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

 AIR PRESSURE(mmH₂O)


Series	Bearing (*)	Rated Voltage (V)	Rated Current (Amp)	Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Noise dB(A)
						(CFM)	m ³ /min		
T127015XL	▲●	12	0.12	1.44	3000	21.13	0.60	2.49	29.1
T127015XM	▲●	12	0.15	1.80	3600	25.36	0.72	3.59	32.8
T127015XH	▲●	12	0.25	3.00	4200	29.59	0.84	4.88	37
T127015XU	▲●	12	0.30	3.60	4800	33.82	0.96	6.38	42.4

*Bearing Type : ○ Sleeve ▲EBR ●2 Ball

*Noise measured at the distance of one meter from the axis of intake.

*The latest version would be as per the standard issued by REGO only.