

Rated Voltage : 12V



Operating Temp : 10~70°C

Protection : Auto-Restart/ Impedance

Material : Housing Plastic (UL : 94V-0)
 Impeller Plastic (UL : 94V-0)

Weight : 31.5g

Safety Approval

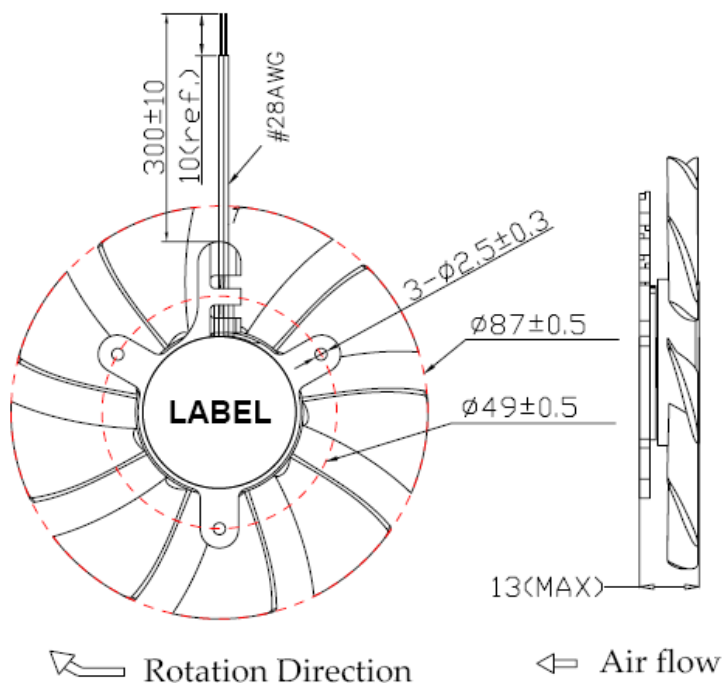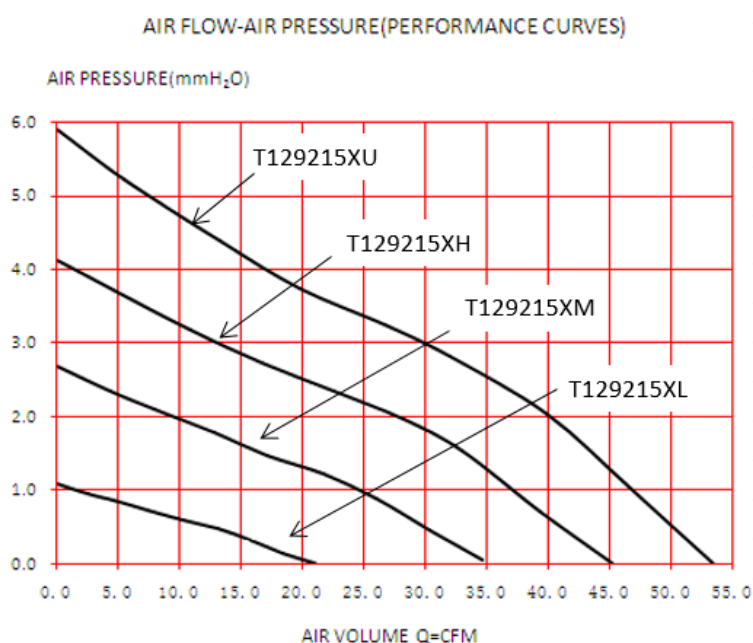

Series	Bearing (*)	Rated Voltage (V)	Rated Current (Amp)	Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Noise dB(A)
						(CFM)	m ³ /min		
T129215XL	▲●	12	0.06	0.72	2000	21.02	0.60	1.08	22
T129215XM	▲●	12	0.14	1.68	3000	34.65	0.98	2.67	29
T129215XH	▲●	12	0.30	3.60	4000	45.21	1.28	4.12	36.7
T129215XU	▲●	12	0.43	5.16	4700	53.47	1.51	5.89	41.7

*Bearing Type : ○ Sleeve ▲EBR ●2 Ball

*Noise measured at the distance of one meter from the axis of intake.

*The latest version would be as per the standard issued by REGO only.